


SpirRex - PAS permanent anti static - HDPE

- HDPE material—**permanent anti static** (PAS)
- Geschikt voor mijnbouw en omstandigheden waar geleiding noodzakelijk is
- Standard black with green inside (for fast recognition)
- For hose and/or bundles from 8 to 200mm

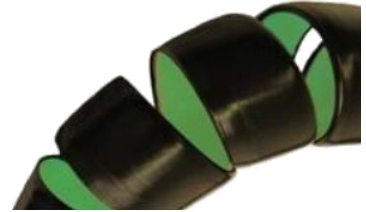


partnumber	Outer diam. (mm)	Inner diam. (mm)	range (mm)	colour	packsize
SPXPAS-16	13	8	11-16mm	black-green	25m
SPXPAS-20	16	11	15-30mm	black-green	25m
SPXPAS-25	21	16	18-40mm	black-green	25m
SPXPAS-32	27	20	20-60mm	black-green	25m
SPXPAS-40	35	27	32-70mm	black-green	25m
SPXPAS-50	50	44	40-80mm	black-green	25m
SPXPAS-60	60	52	50-90mm	black-green	25m
SPXPAS-75	75	66	60-100mm	black-green	20m
SPXPAS-90	90	81	70-120mm	black-green	20m
SPXPAS-110	110	99	80-140mm	black-green	15m

Surface resistance average 8 kOhm/m²

How to get the right length needed?

Outside diameter hose (mm)
 _____ x length (m) of the hose(s)
 Inside diameter SpirRex (mm)

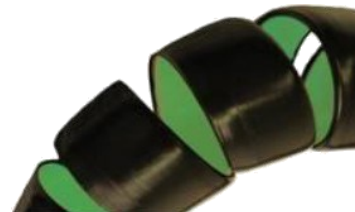

Installationtool SPXPAS-20 t/m SPXPAS-50

Installationtool SPXPAS-50 t/m SPXPAS-140

